

Gough *SnoGuards*™


4133 Du Bois Blvd., Brookfield, IL 60513 Voice: 708-485-6272 Fax 708-485-6273
E-mail: Sales@SnoGuard.com Web: www.SnoGuard.com

Model #SGAR-SLS:

SnoGuard™ with Slotted Strap for Miscellaneous Retrofit

Most of these are used to retrofit on slate roofs. (But not limited to slate.)

This unobtrusive, medium height SnoGuard is stronger than other brands, will not fold over and has the same classical, traditional look for 90 years.

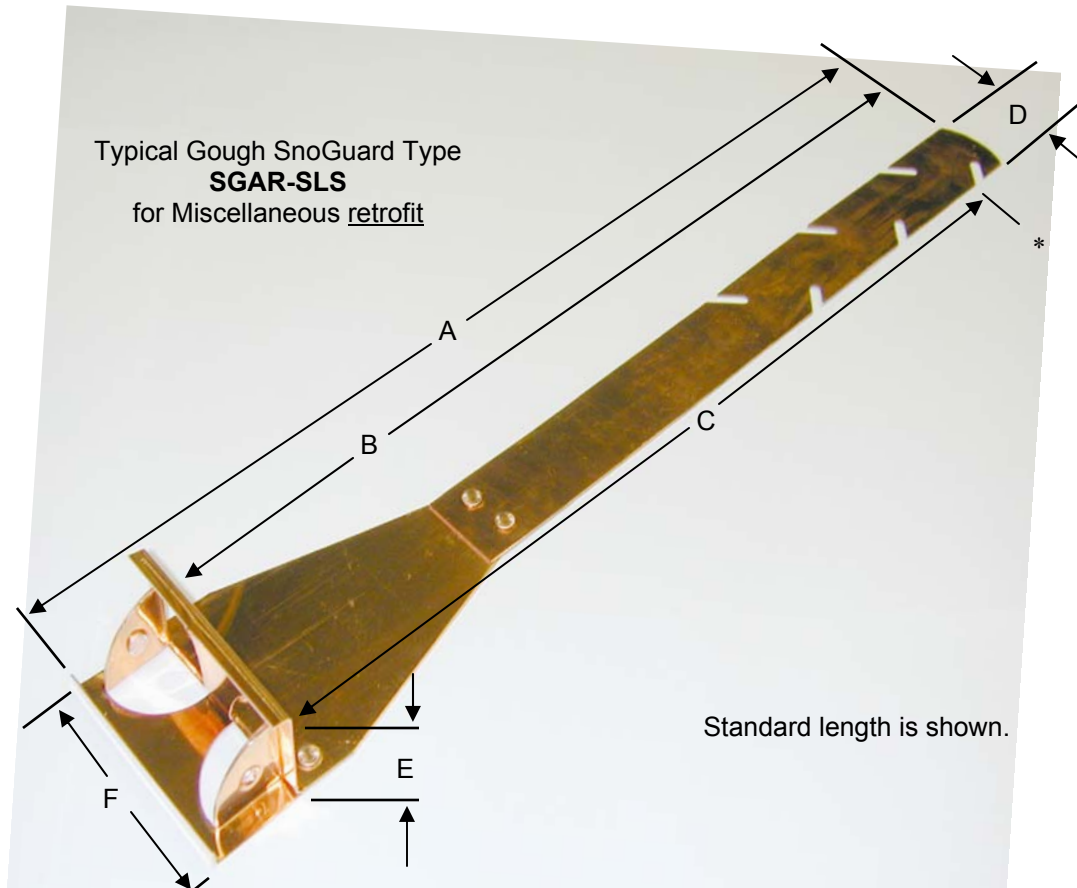

- Made of 24 oz. cold rolled copper. 50% heavier / thicker than most copper snow guards. Design includes two vertical pedestals of double 24 oz. copper (eq. 48 oz.) for strength, making it one of the most stable / strongest snow guards available.
- Copper meets ASTM B370 Standards. 3003 H-14 aluminum meets ASTM B209, ASME SB209 and AMS QQ-A-250/2 Standards.
- Flat copper strap and base allow slate or other roofing material to lay flatter.
- For retrofit. Mounting strap has 6 staggered slots 1" on-center for adjustments to slide onto hidden nail. The highest slot is about 15" from bottom of shingle / slate.* Custom lengths (shorter or longer) are available.
- Medium height, but "foot" is wider - so it retains more snow per unit than most snow guards.
- Optional material: Lead coated copper, mill aluminum and powder coated colors. (Call for info.)

TYPICAL (Standard) SIZE IS INDICATED ABOVE (+/-) 1/16" (1.6MM)

A = 17 3/8" B = 16" C = 15" D = 1 1/4" E = 1 1/4" F = 3 1/4"